

# LED WALL PACK LIGHT ( WK07 )

**Wattages:** 40/30/20W,60/40/30W, 80/60/40W, 100W,120W, 100/80/60W, 120/100/80W Tunable



The WK07 series full cutoff wall pack has a novel and simple design. The WK07 series wall pack retains the traditional wall pack installation method and is highly favored by customers.



## Product Features:

- Aesthetic, utility appearance, and patented;
- Optically designed PC cover, almost no dark macula, which makes the whole lamp emit light evenly and meets the requirements of DLC Premium 5.1;
- Adopt high light transmission and antzi-UV PC lampshade;
- Low-voltage light control sensor can be installed, which is safe and reliable;
- Power and CCT selective are available to meet the different needs of customers and reduce the inventory pressure ;
- Easy and fast installation , and traditional junction box installation method is retained;
- Standard respirator extends the service life of lamps.
- IP65, completely waterproof and dustproof;
- 120-277V / 0-10V and 120-347V / 277V-480V• 0-10V dimming power supply are available.

SPECIFICATION					
MODEL	SS-WK07-40W-H-XXK SS-WK07-40W-H-HV-XXK SS-WK07-40W-H-TCP-Y SS-WK07-40W-H-MV-TCP-Y	SS-WK07-60W-H-XXK SS-WK07-60W-H-HV-XXK SS-WK07-60W-H-TCP-Y SS-WK07-60W-H-MV-TCP-Y	SS-WK07-80W-H-XXK SS-WK07-80W-H-HV-XXK SS-WK07-80W-H-TCP-Y SS-WK07-80W-H-MV-TCP-Y	SS-WK07-100W-H-XXK SS-WK07-100W-H-HV-XXK SS-WK07-100W-H-TCP-Y SS-WK07-100W-H-MV-TCP-Y	SS-WK07-120W-H-XXK SS-WK07-120W-H-HV-XXK SS-WK07-120W-H-TCP-Y SS-WK07-120W-H-MV-TCP-Y
WATTAGE	40W;40/30/20W Tunable	60W;60/40/30W Tunable	80W;80/60/40W Tunable	100W;100/80/60W Tunable	120W;120/100/80W Tunable
EFFICACY	Up to 130LPW				
CCT	3000K/4000K/5000K Tunable				
CRI	Ra >70				
INPUT VOLTAGE	AC120-277V, AC120-347V, AC277-480V				
OPERATING TEMPERATURE	-40°F ~113°F				
STORAGE TEMPERATURE	-40°F ~158°F				
PF	>0.9				
DRIVER EFFICIENCY	>90%				
PROTECTION LEVEL	Location				
LIFE TIME	>50000 hours				
WARRANTY	5 year limited				

# LED WALL PACK LIGHT ( WK07 )



**Wattages:** 40/30/20W,60/40/30W, 80/60/40W, 100W,120W, 100/80/60W, 120/100/80W Tunable

## Packing/Weight

Model	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/pcs (lbs/Kg)	Remarks
40W/30W/20W	L15.55"*W10.63"*H9.41" L395*W270*H239mm	1pcs/ctn	5.62Lbs/(2.55Kg)	5.62Lbs/(2.55Kg)	0.15M cable
80W/60W/40W	L15.55"*W10.63"*H9.41" L395*W270*H239mm		5.84Lbs/(2.65Kg)	6.94Lbs/(3.15Kg)	
100W/80W/60W	L15.55"*W10.63"*H9.41" L395*W270*H239mm		5.84Lbs/(2.65Kg)	6.94Lbs/(3.15Kg)	
120W/100W/80W	L15.55"*W10.63"*H9.41" L395*W270*H239mm		5.84Lbs/(2.65Kg)	6.94Lbs/(3.15Kg)	

## Product Dimension

40W/60W/80W/100W120W

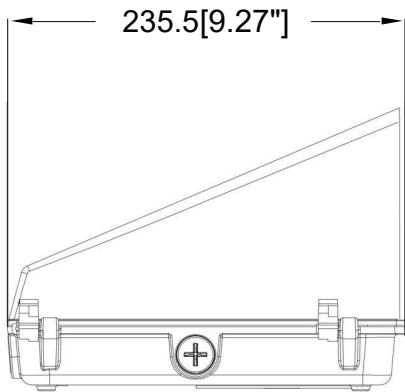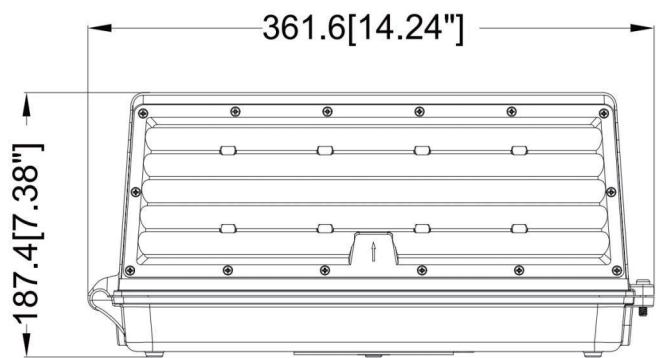


## Product Accessories

### ACCESSORIES MOUNTING BRACKETS



4 Pcs Screws    5 PCS Wire Nuts    1 Pcs foam

### OPTIONS

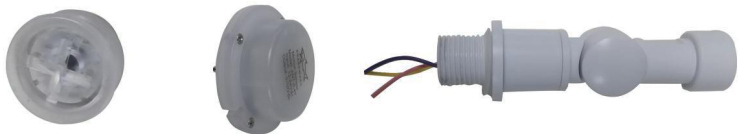

Photosensor

ANT-5-4T  
ANT-6-4T

ANT-5-16B-3

# LED WALL PACK LIGHT ( WK07 )

Wattages: 40/30/20W,60/40/30W, 80/60/40W, 100W,120W, 100/80/60W, 120/100/80W Tunable

## ORDERING GUIDE:

### EXAMPLE:


SS-WK07-40W-H-XX-TCP(XX)-Y

SS	WK	40W	H	XX	TCP(XX)	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	INPUT VOLTAGE	Tunable CCT and Power	CONTROL
Starlake	LED WALL PACK LIGHT (WK07)	40W=40/30/20W 60W=60/40/30W 80W=80/60/40W 100W=100/80/60W 120W=120/100/80W		Blank=120-277Vac MV=120-347Vac HV=277-480Vac	(3000K/4000K/5000K)	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Blank: no provide sensor


## PHOTOMETRICS:

For complete IES files, please visit our website.


SS-WK07-40W-H-5000K

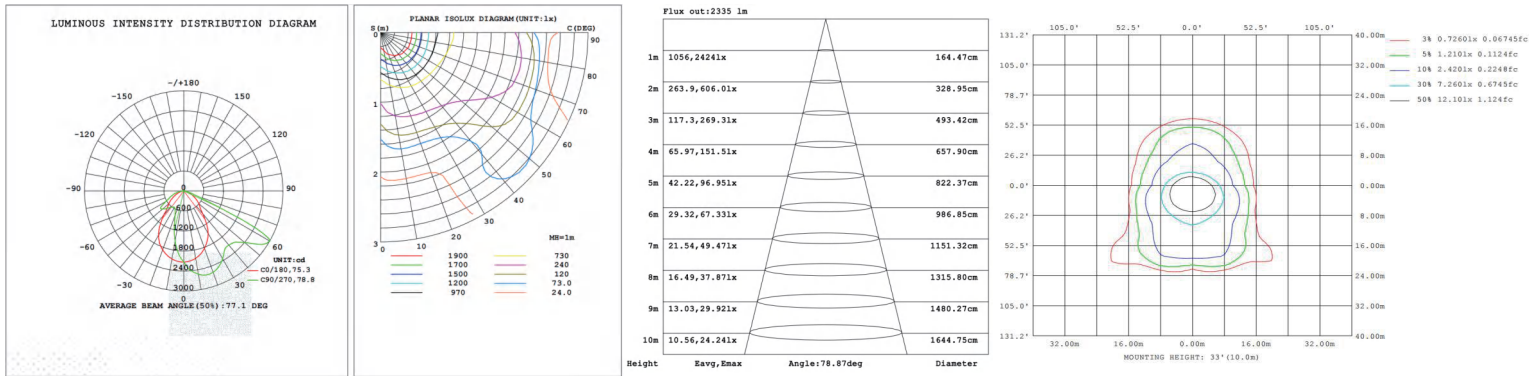

SS-WK07-60W-H-5000K

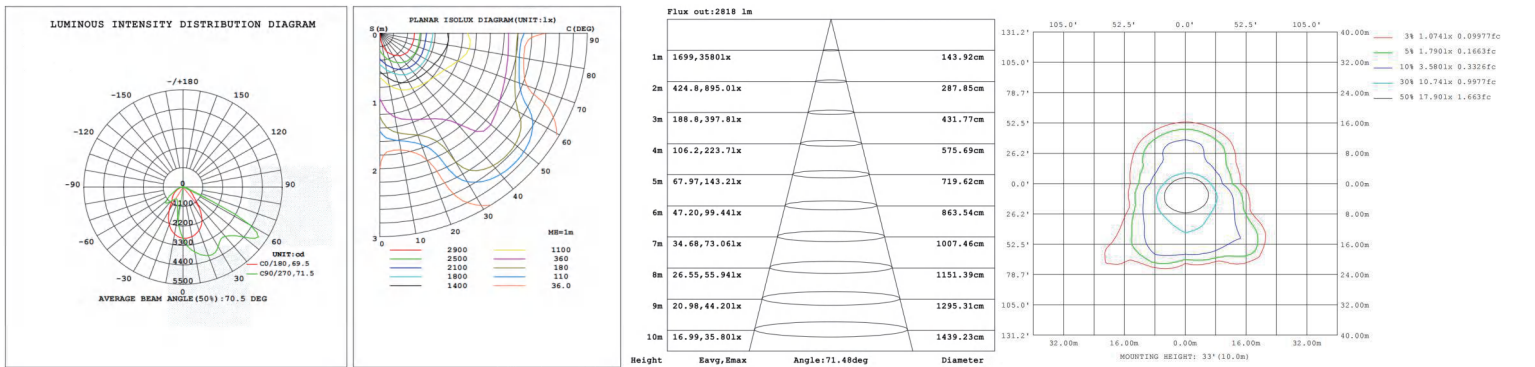


SS-WK07-80W-H-5000K

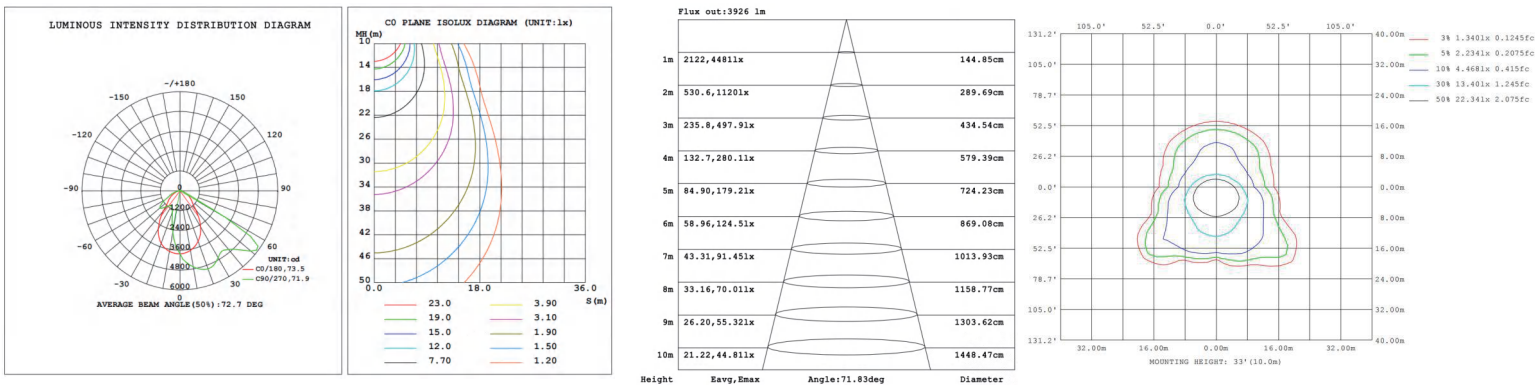


# LED WALL PACK LIGHT ( WK07 )

**Wattages:** 40/30/20W,60/40/30W, 80/60/40W, 100W,120W, 100/80/60W, 120/100/80W Tunable

SS-WK07-100W-H-5000K

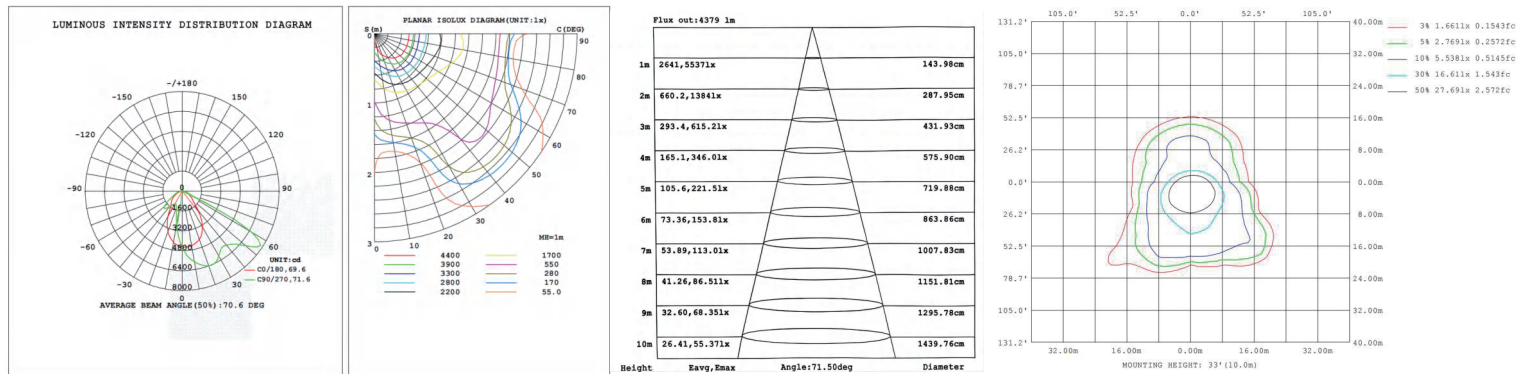


SS-WK07-120W-H-5000K

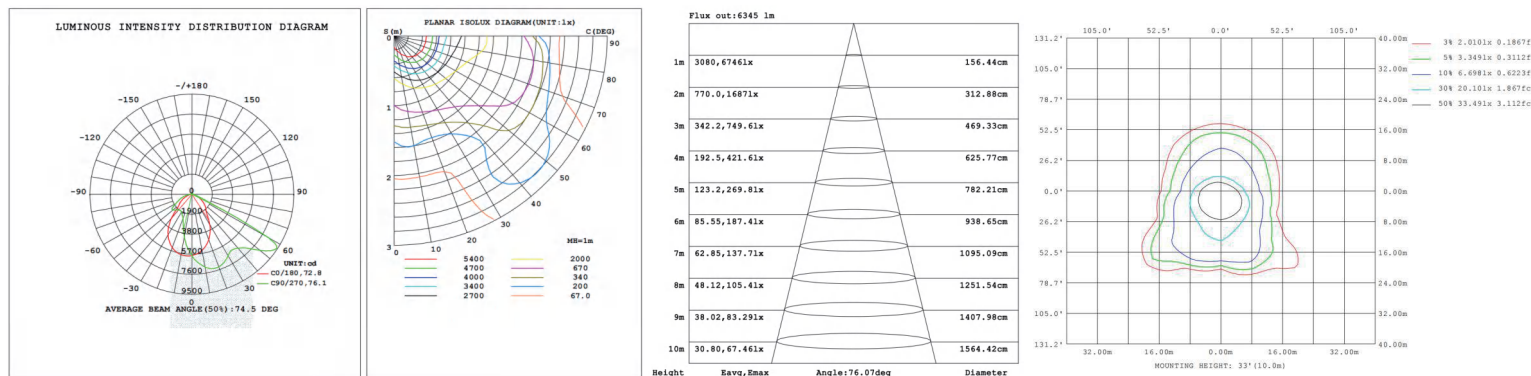


## Installation Instruction


1. Use a screwdriver to unscrew the lamp screws and remove the upper half of the fixture.

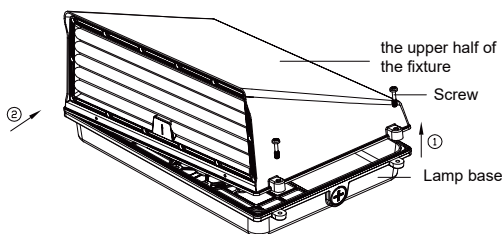


2. Unscrew the cover of the entry hole on the lamp base and remove the cover.

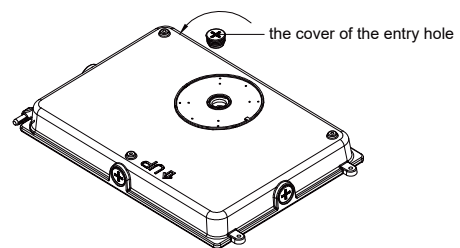

3. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.

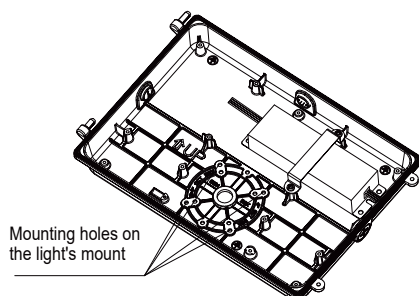

4. Put the input line in the embedded box passes through the waterproof pad and then passed through the lamp base.

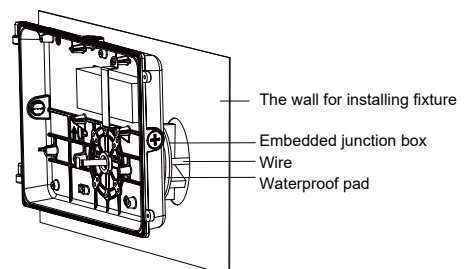





# LED WALL PACK LIGHT ( WK07 )

**Wattages:** 40/30/20W,60/40/30W, 80/60/40W, 100W,120W, 100/80/60W, 120/100/80W Tunable


5. Use screw to lock the lamp base on the embedded junction box.




6. Connect the input wire and the dimming wire of the light, then put the connected wires into the embedded terminal box.

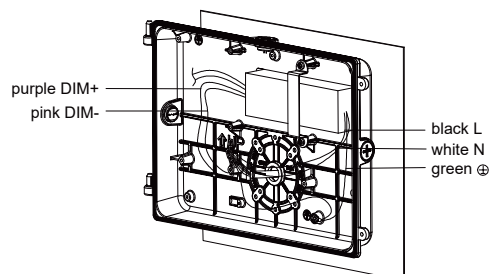

7. Connect the output wires of driver with the wires of PCB board.

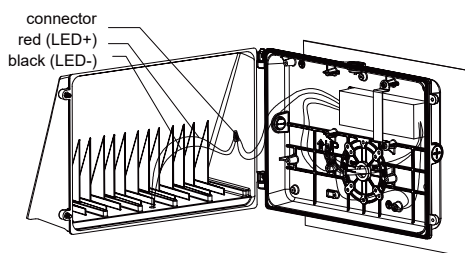

8. Use screws to lock the fixture. Installation completed.



## Applications:



## Safety Information:

1. Using the standard working voltage: AC120~277V / AC120~347V / AC277-480V,50/60Hz, do not exceed.
2. Be sure the power supply is turned off before installation.
3. Switch off power of the mains supply or the connection lead respectively before doing any works.
4. Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
5. Directly fix bolts on the installation stem through the hole on the mounting bracket.
6. Please read the specification carefully before installation.
7. The complete installation must be handled by an electrical expert.